


- NOTES:**
1. ALL MATERIALS AND PROCESSES MUST CONFORM TO ROHS AS SPECIFIED IN 010-100594
 2. PACKING FILLERS, BOXES AND LABELS MUST BE MANUFACTURED ACCORDING TO CHRISTIE DIGITAL SYSTEMS STANDARD # 010-101136-01: "PACKAGING LABELING AND MATERIAL GUIDELINE"
 3. REFER TO SUPPLIER QUALITY STANDARD 010-101164-01 FOR GENERAL QUALITY REQUIREMENTS AND PRACTICES, AND FOR CRITICAL FEATURE INSPECTION METHODS IF INDICATED WITH  ON THIS SPECIFICATION
 4. NOT ALL DIMENSIONS SHOWN. REFER TO CAD MATH DATA FOR DETAILS.
 5. CAD MATH DATA AND UNTOLERANCED DIMENSIONS ARE BASIC UNLESS OTHERWISE SPECIFIED

REVISION HISTORY of: 020-100488-01			
REV	DESCRIPTION OF CHANGE	BY	DATE UPDATED
01	INITIAL RELEASE	PG	9/24/2009
02	ADD DIMENSIONS FOR M6 SLOTS IN LEVELLING FEET; NOTE OPTIONAL SET-UP KIT	PG	4/27/2010
03	UPDATE CG DIMENSION, ADD WALL MITG BRKT DETAILS (PG. 3)	PG	5/3/2010
04	UPDATE TORQUE SPEC ON REAR M6 BOLTS, ADD LENGTH OF SCREW ENGAGEMENT	PG	6/10/2010



GENERAL NOTES:

MASS: 9.2 kg (20.3 lbs)

AMBIENT AIR TEMPERATURE: 40°C (104°F) MAX.
EXHAUST REQUIREMENTS: 70 cfm @ 40°C (104°F)

POWER REQUIREMENTS: SINGLE PHASE 100-240V, 12 AMP BREAKER
POWER CONSUMPTION: 110 W



ROOM HEAT LOAD: 375 btu/hr

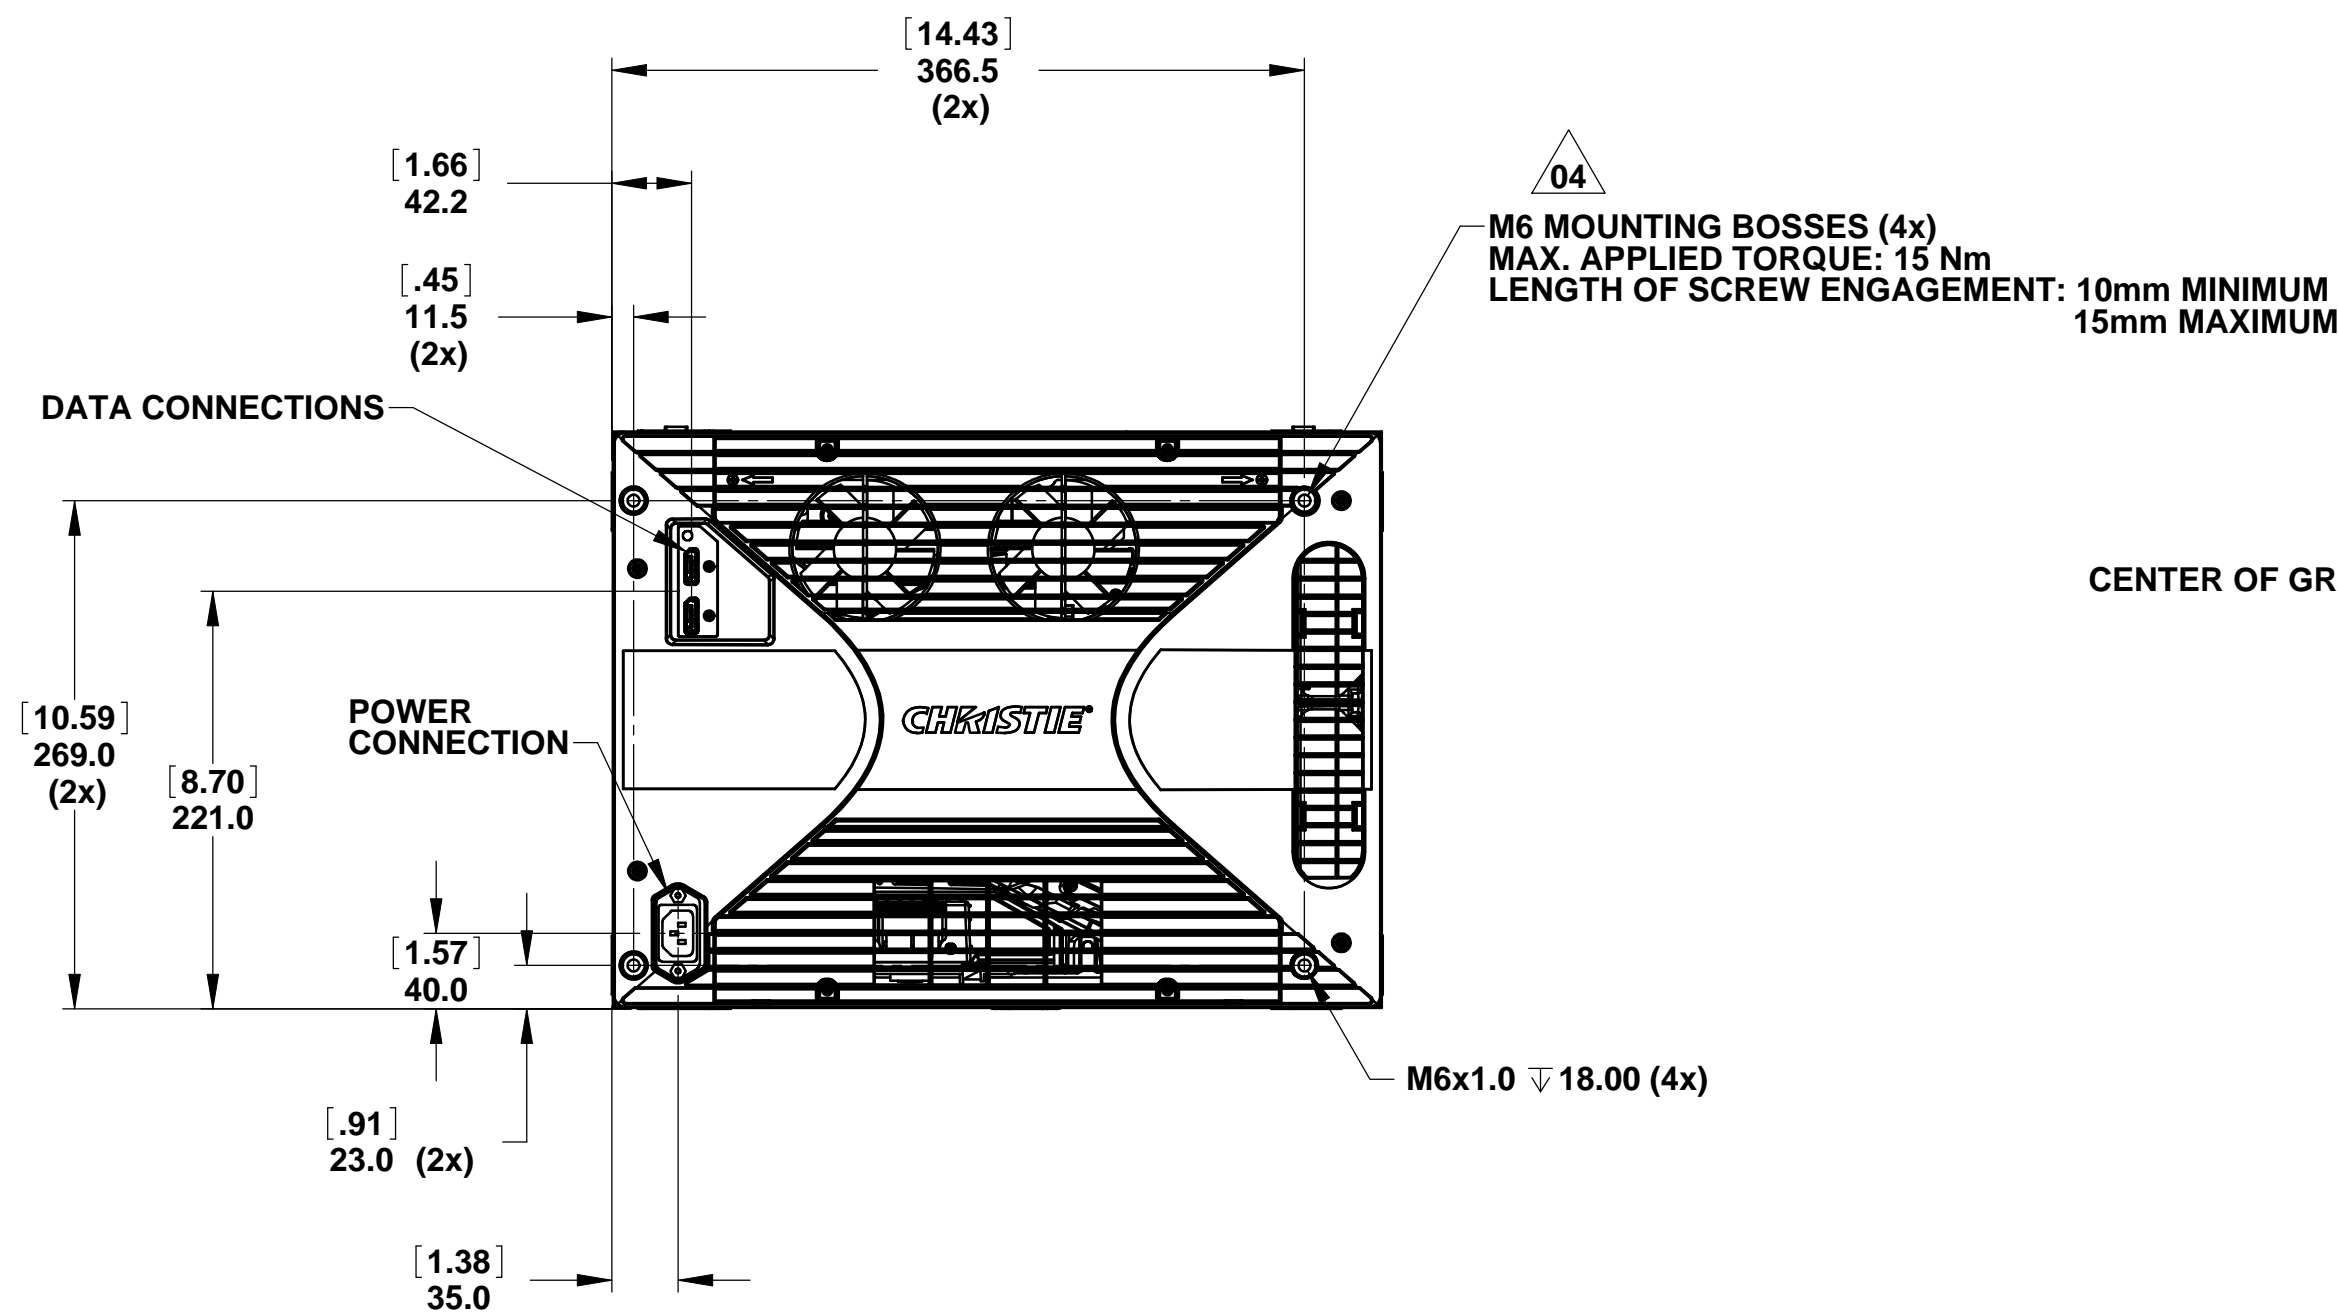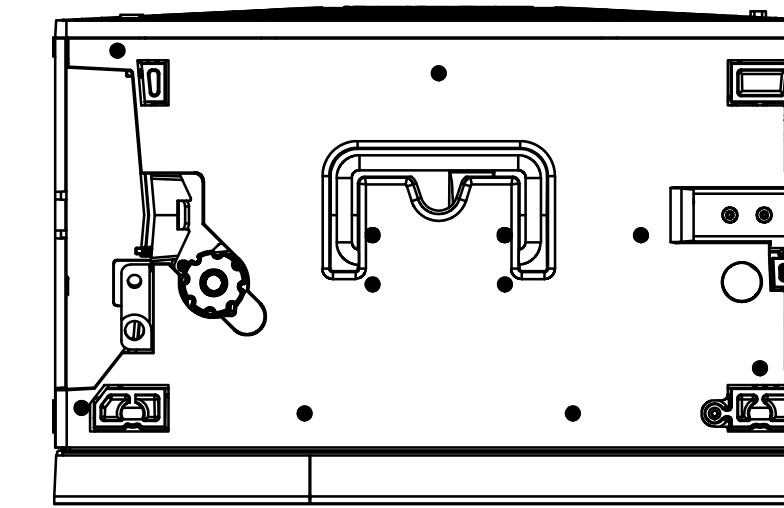


CENTER OF GRAVITY


CENTER OF GRAVITY

ATTACHING SCREEN TO DISPLAY UNIT

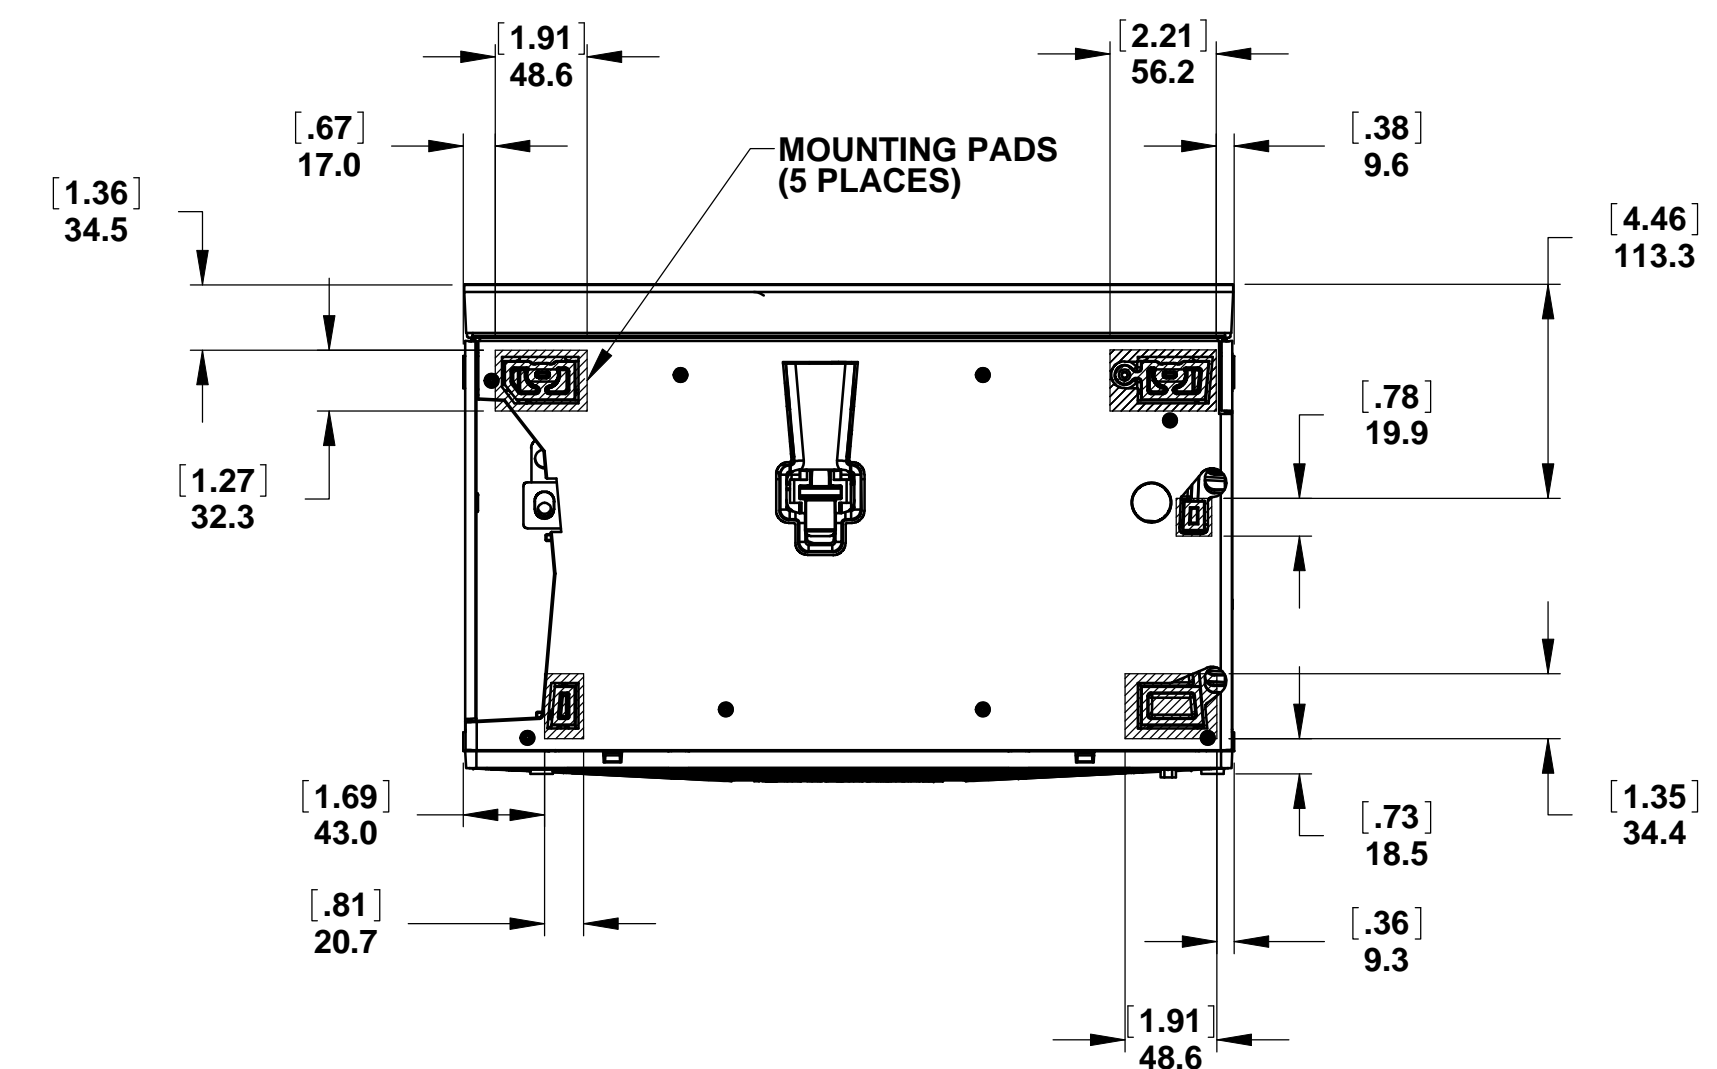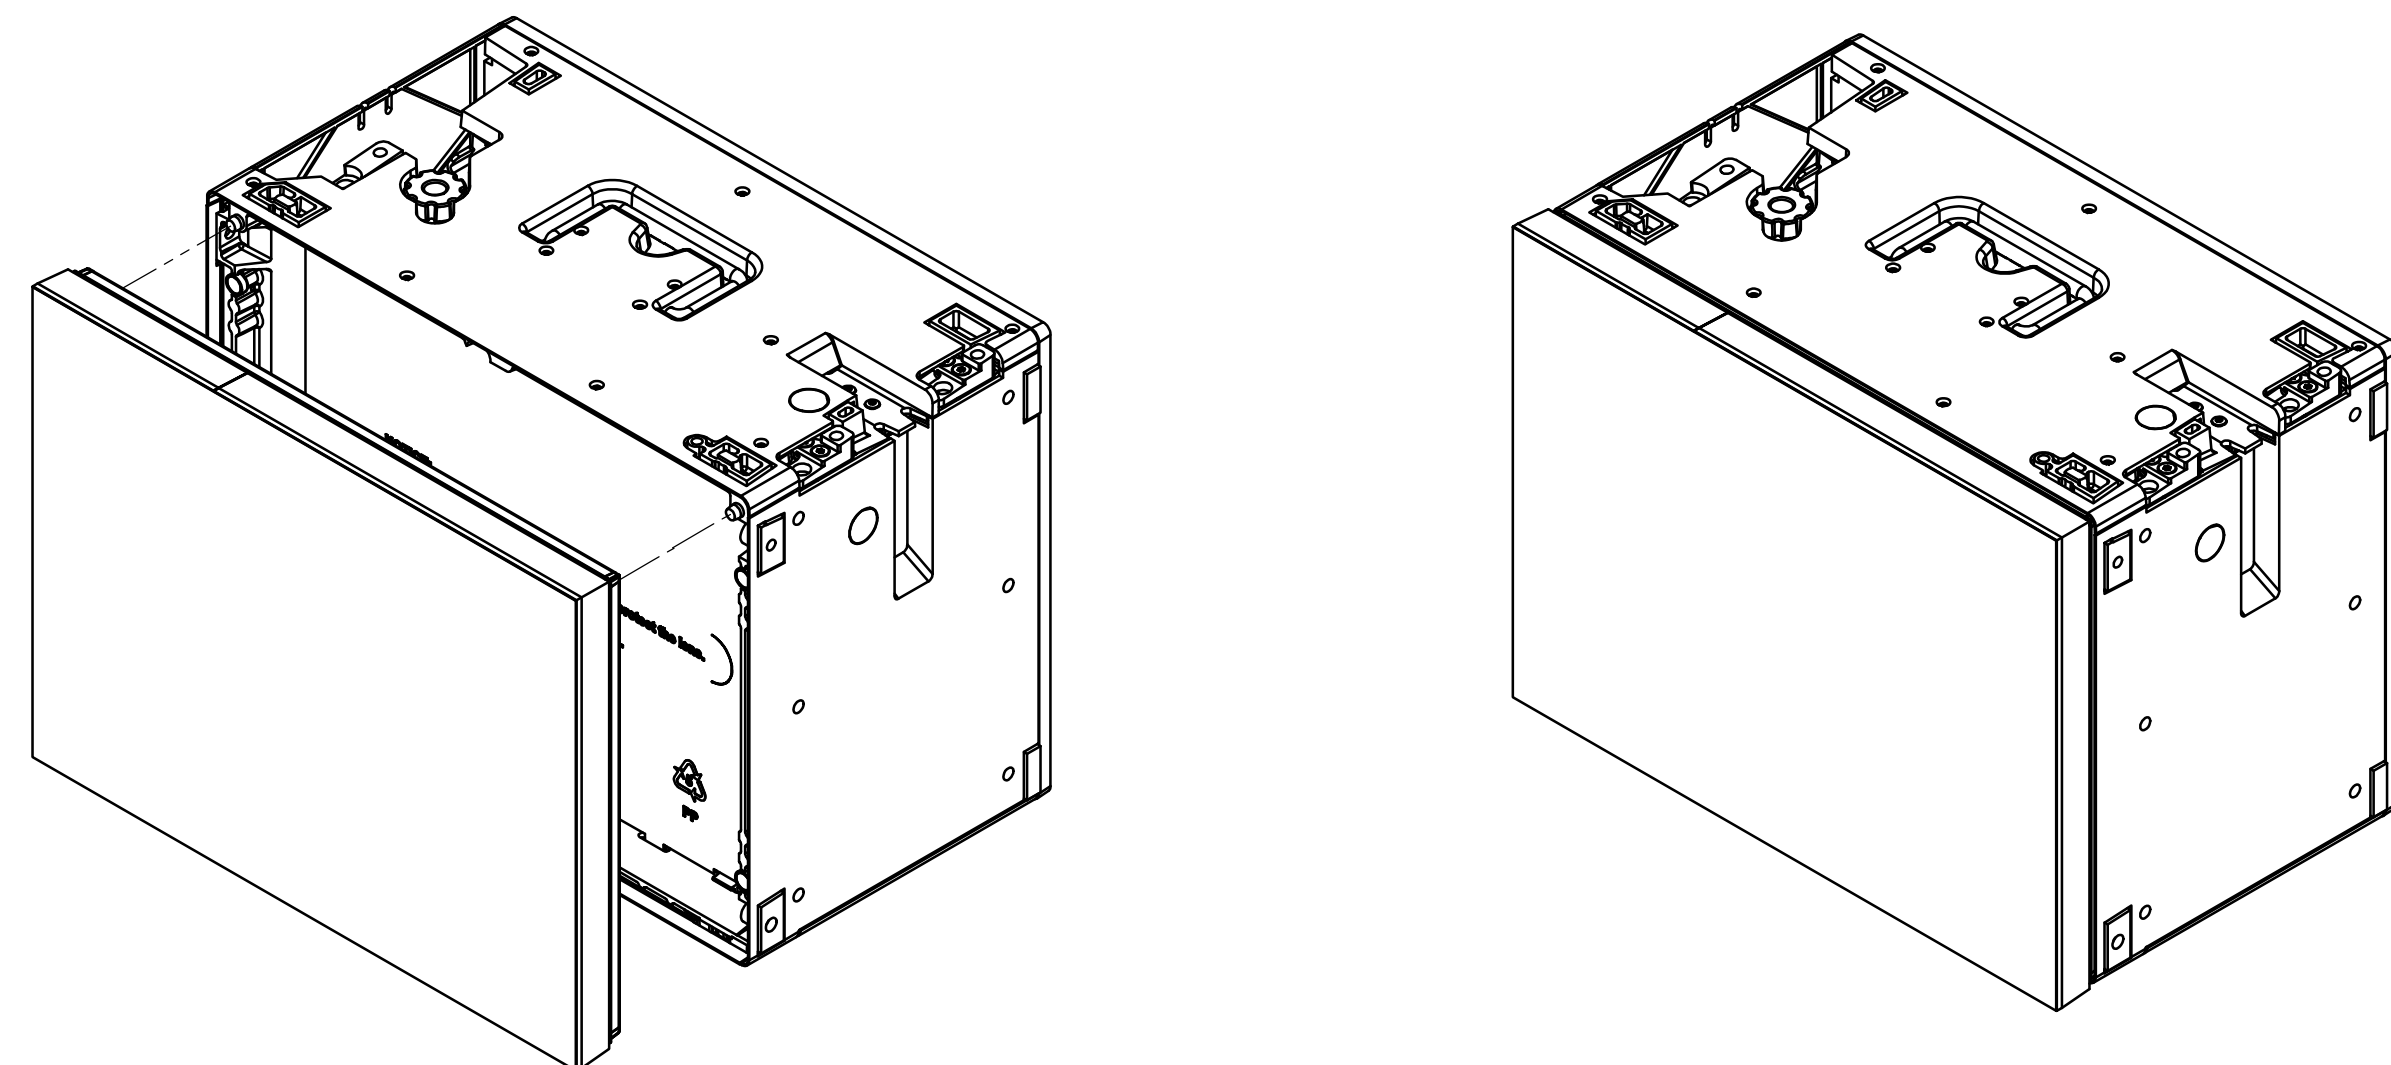


MECH. REF #:	M036143	UNITS:	MILLIMETRES [INCHES]	CAD MAINTAINED DATA	CHANGES SHALL BE INCORPORATED ELECTRONICALLY	 CHRISTIE DIGITAL SYSTEMS USA, INC. CHRISTIE DIGITAL SYSTEMS CANADA, INC.
USED ON:	MICROTILES	UNLESS OTHERWISE SPECIFIED INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M-1994		DRAWN BY:	F. GROH	
MATERIAL:	NOT APPLICABLE	ALL DIMENSIONS SHOWN APPLY BEFORE PLATING AND COATINGS		DRAWN DATE:	9/24/2009	PROPRIETARY NOT TO BE DISCLOSED OR REPRODUCED IN ANY MANNER WITHOUT THE EXPRESS WRITTEN PERMISSION OF CHRISTIE
DEBURRING:	NONE	TOLERANCES APPLY AS SHOWN BELOW		THIRD ANGLE PROJECTION		
FINISH:	NONE	DECIMAL PLACES	INCHES	MILLIMETRES	PART DESCRIPTION DWG LINE MICROTILES	
COATING:	NONE	.XXX	± .005	± 0.1	SIZE	D
I.D.:	NONE	.XX	± .010	± 0.3	PART NUMBER	
SIMILAR TO:	NONE	.X	± .020	± 0.5	SCALE	1:4
		ANGULAR DIMENSIONS				REVISION
		XX°	± 0.5°		MASS	0 LBS [0 KG]
		XX'X"	± 0.1°		SHEET 1 OF 3	
		SURFACE ROUGHNESS	MICROINCH	MICRON		
			63	1.6		



MICROTILE SHOWN WITH LEVELLING FEET

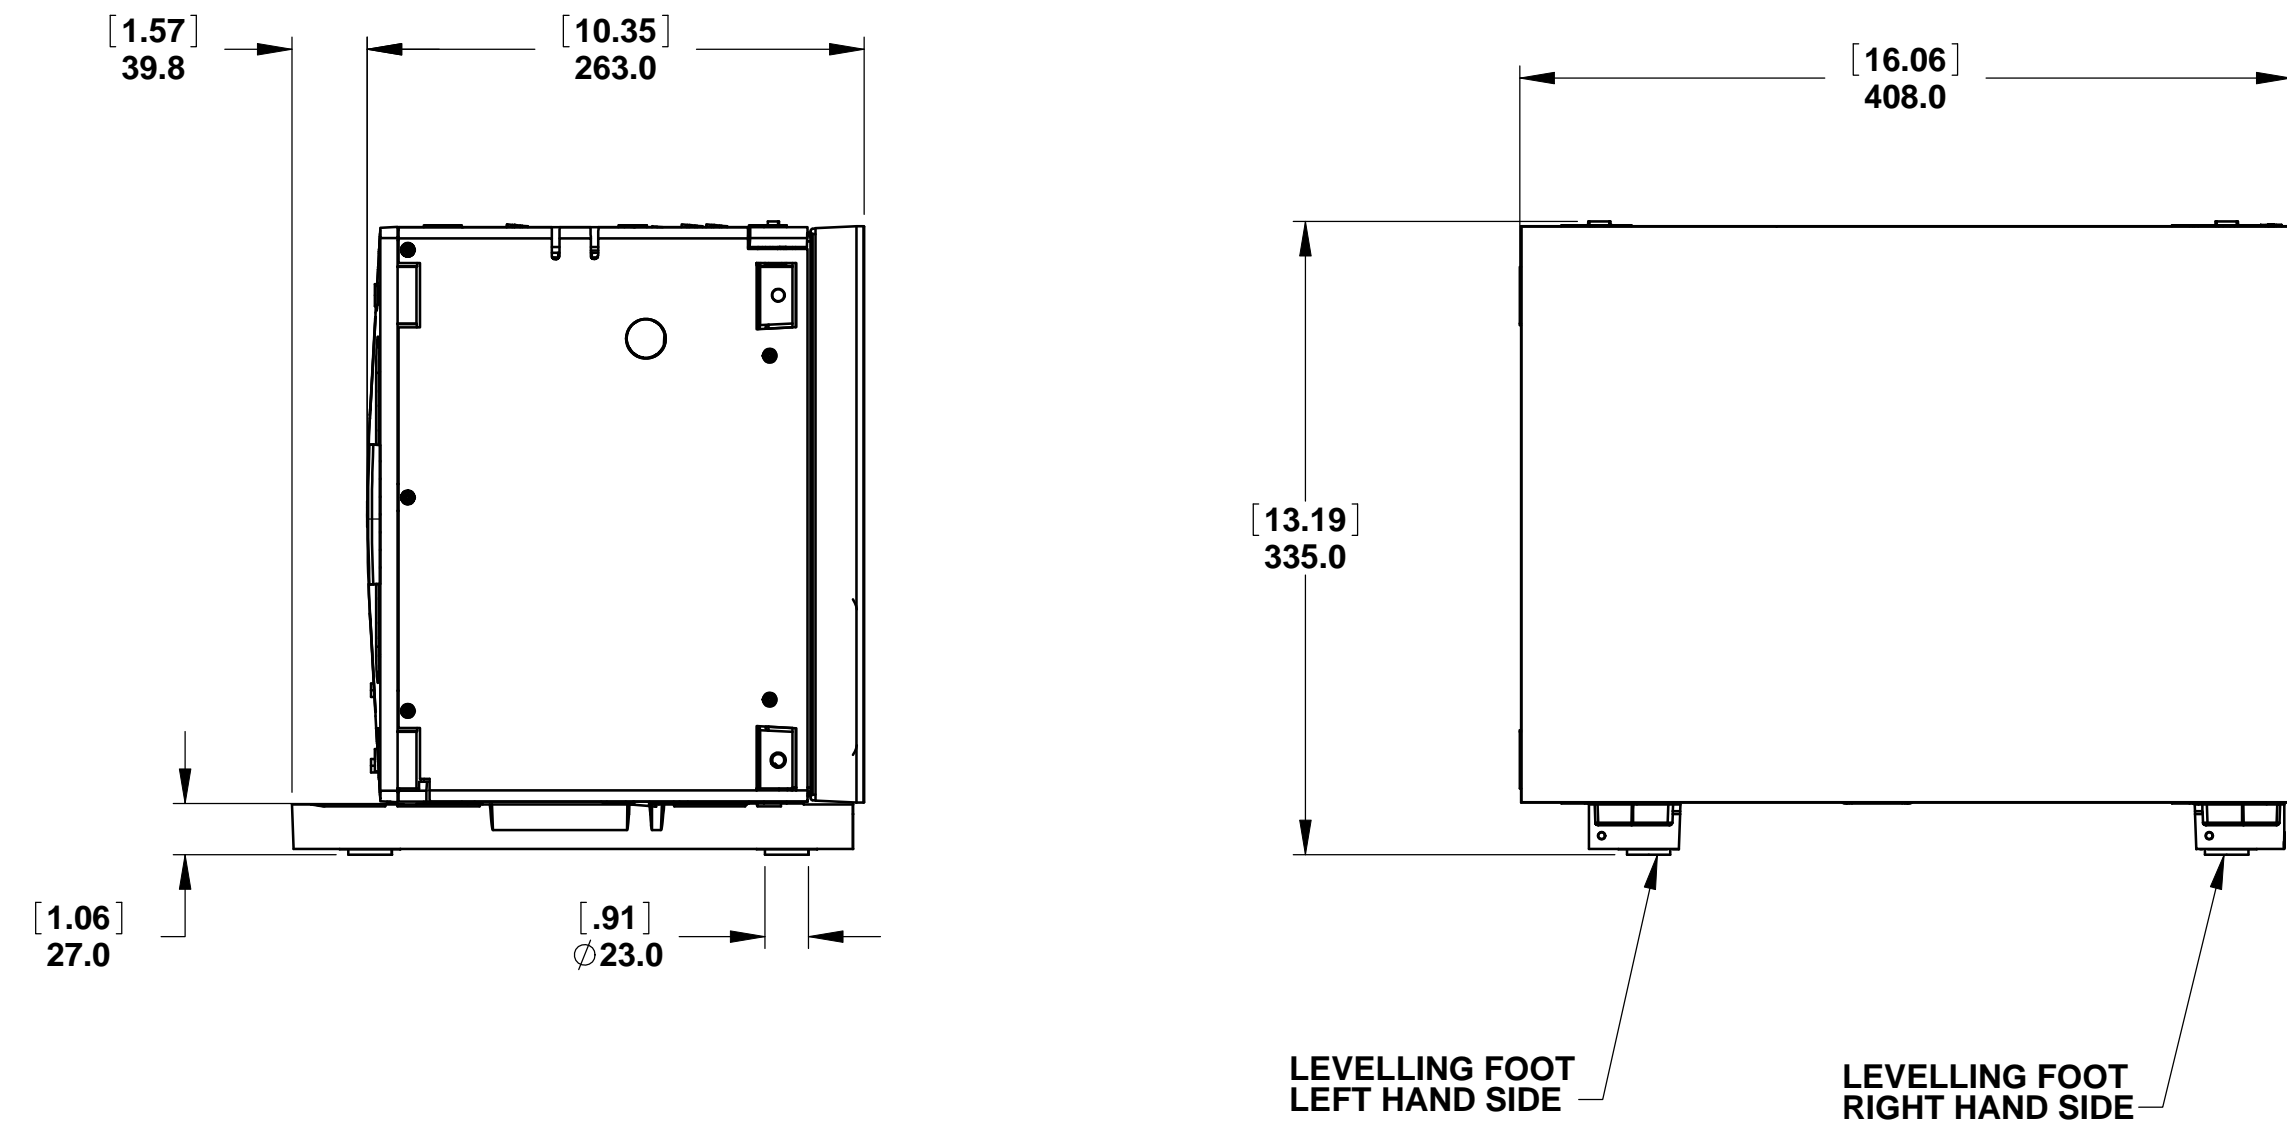



ATTACHING LEVELLING FEET WITH VERTICAL SCREWS

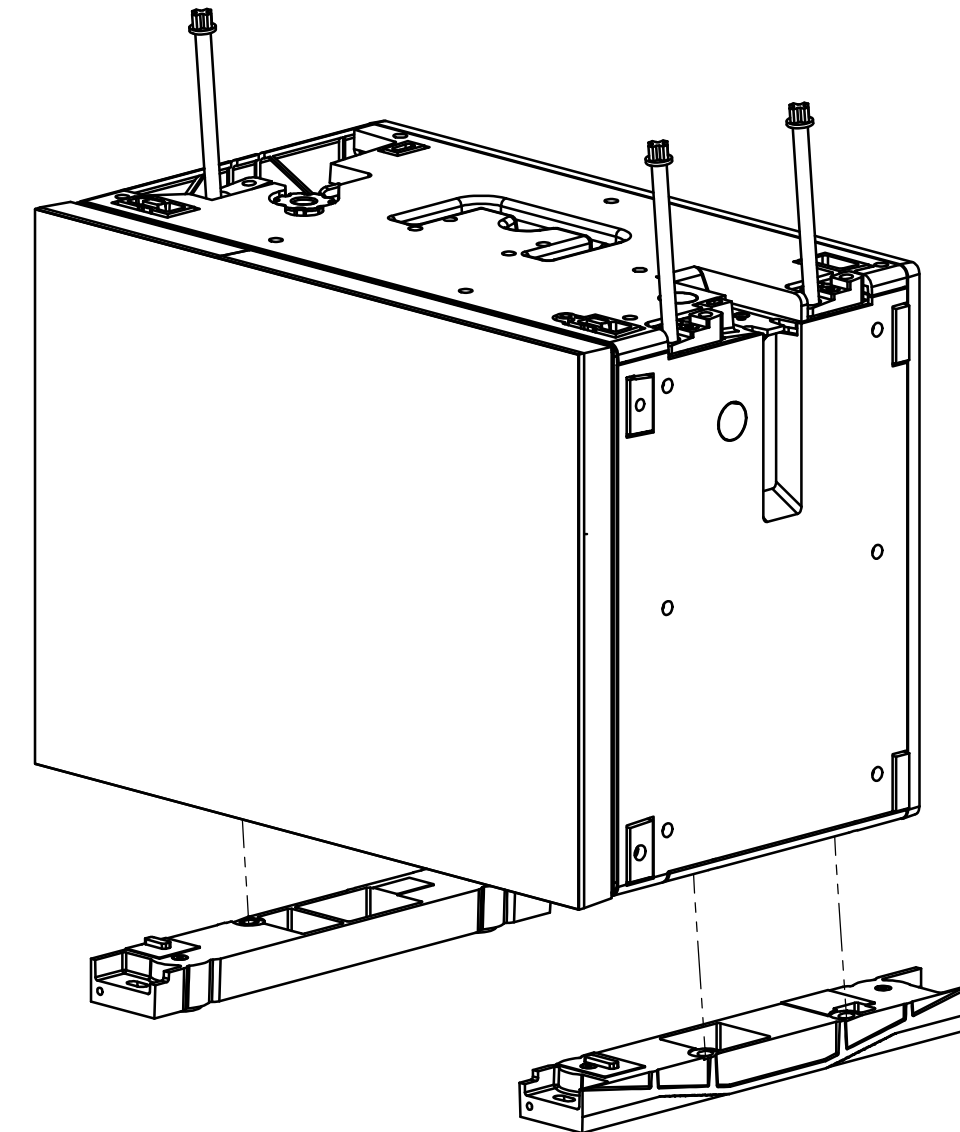


AIR FLOW

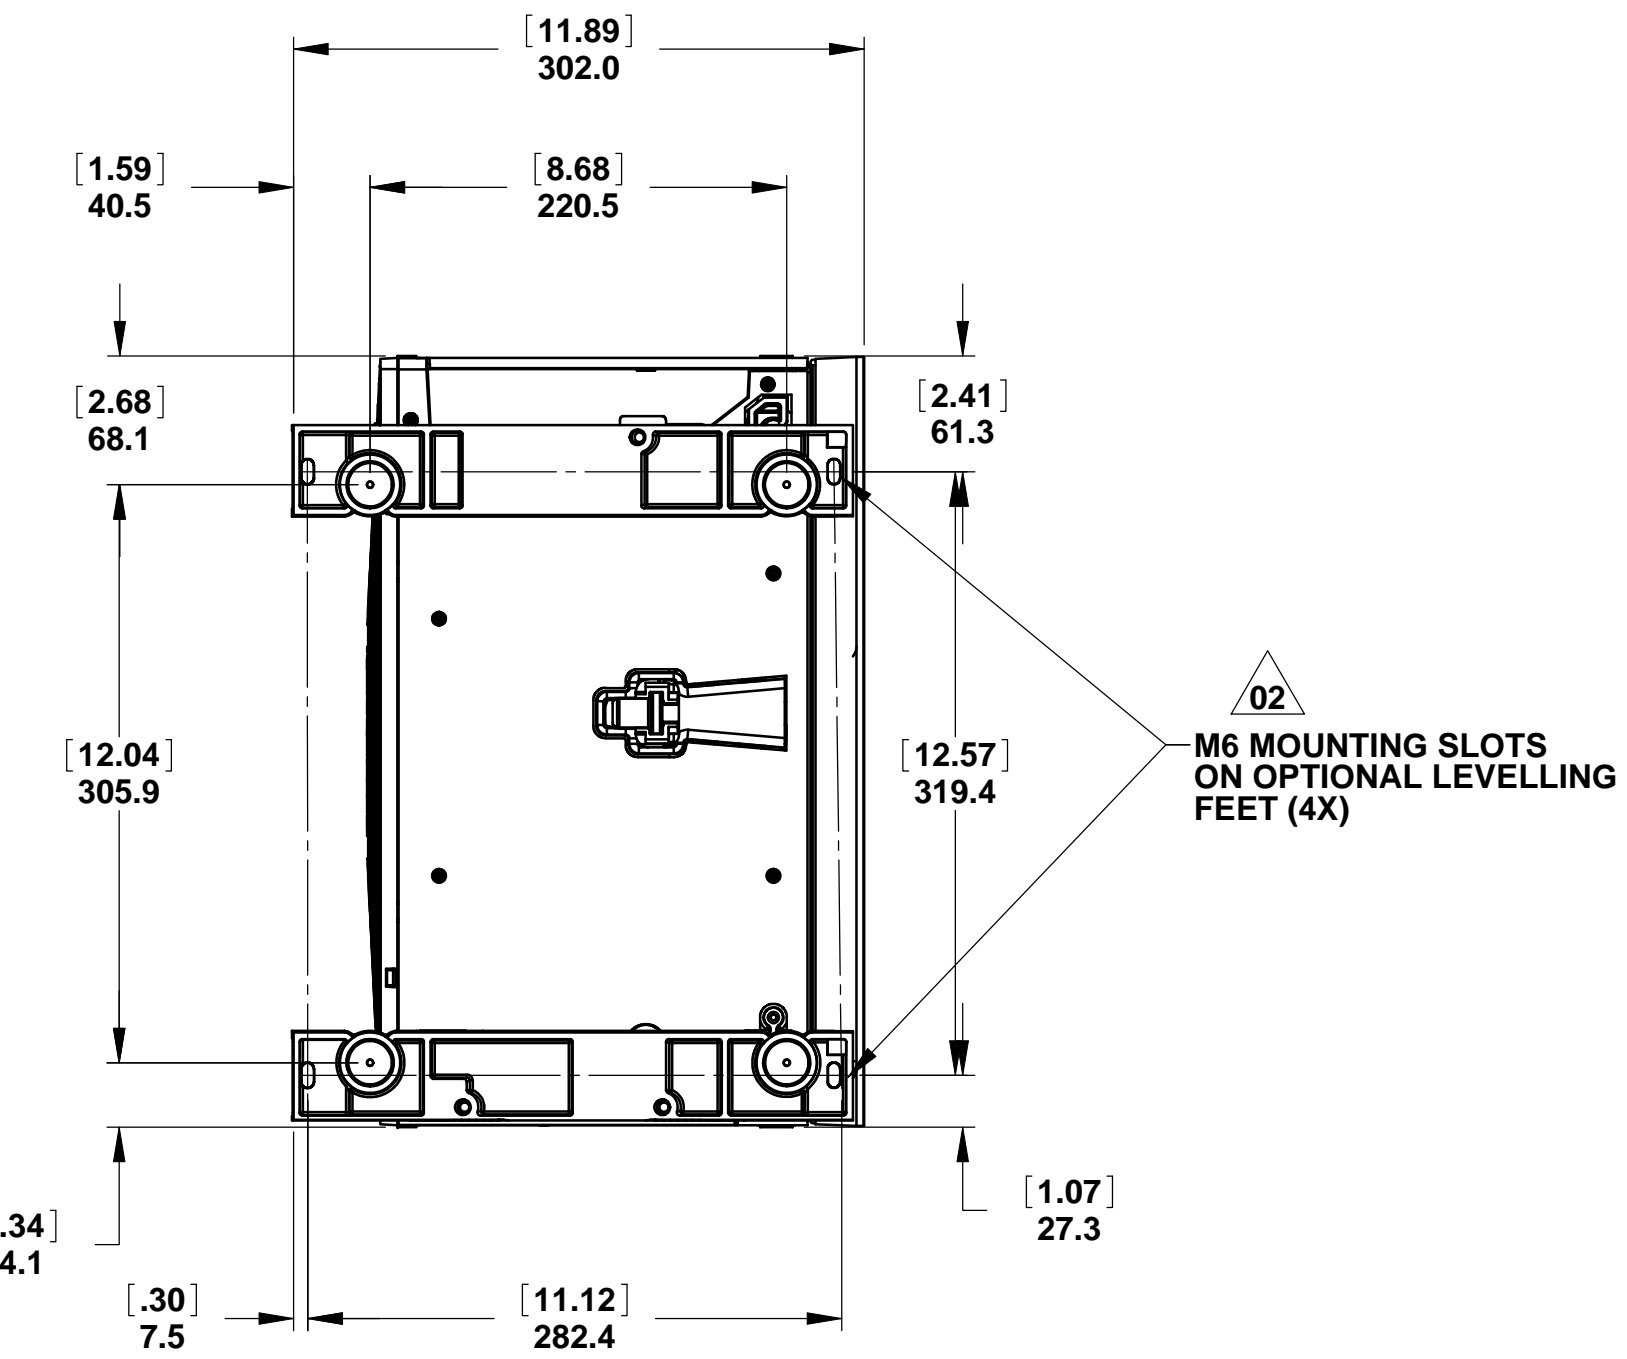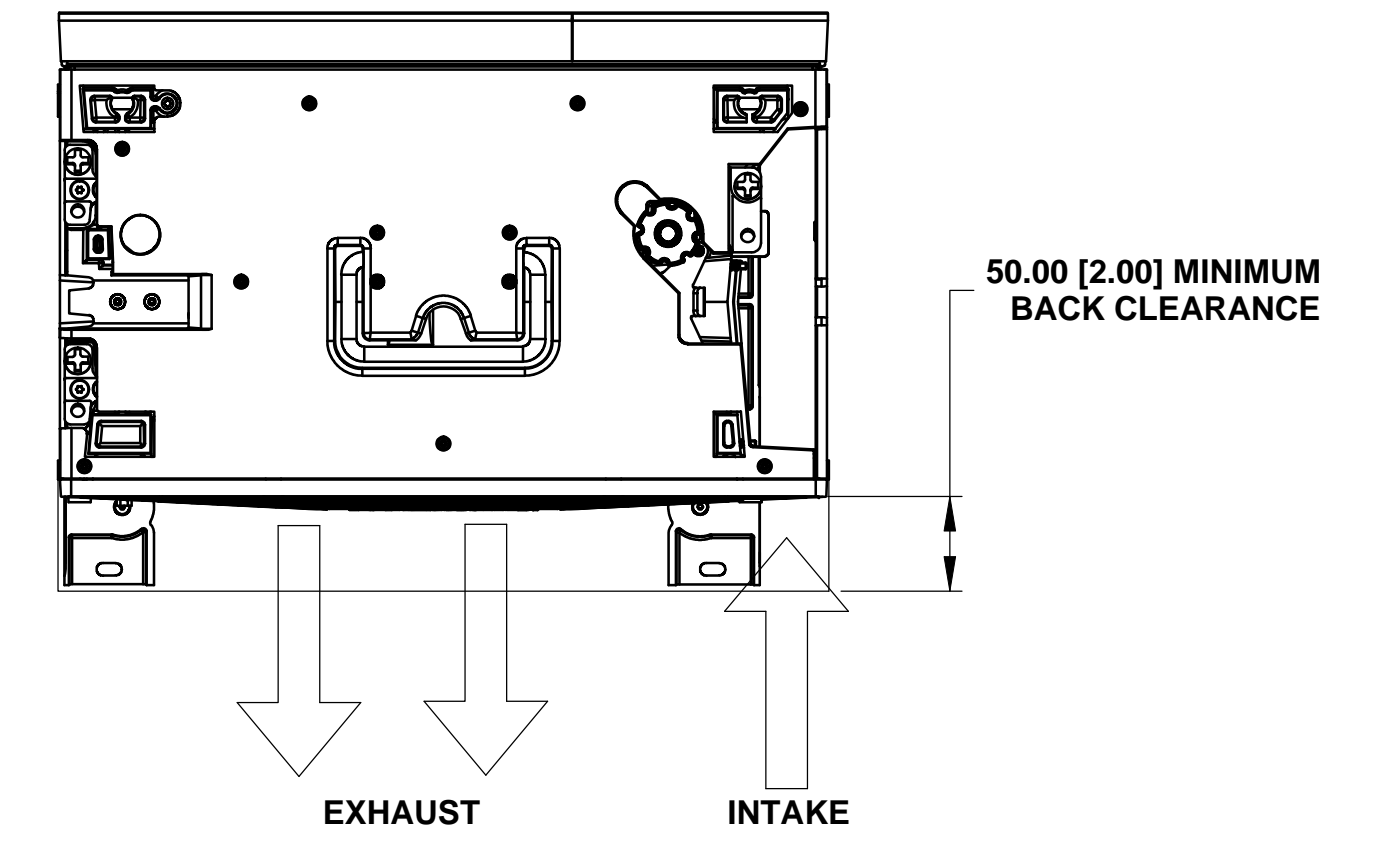

MINIMUM CLEARANCE ABOVE TOP ROW FOR PLACEMENT OF VERTICAL SCREWS


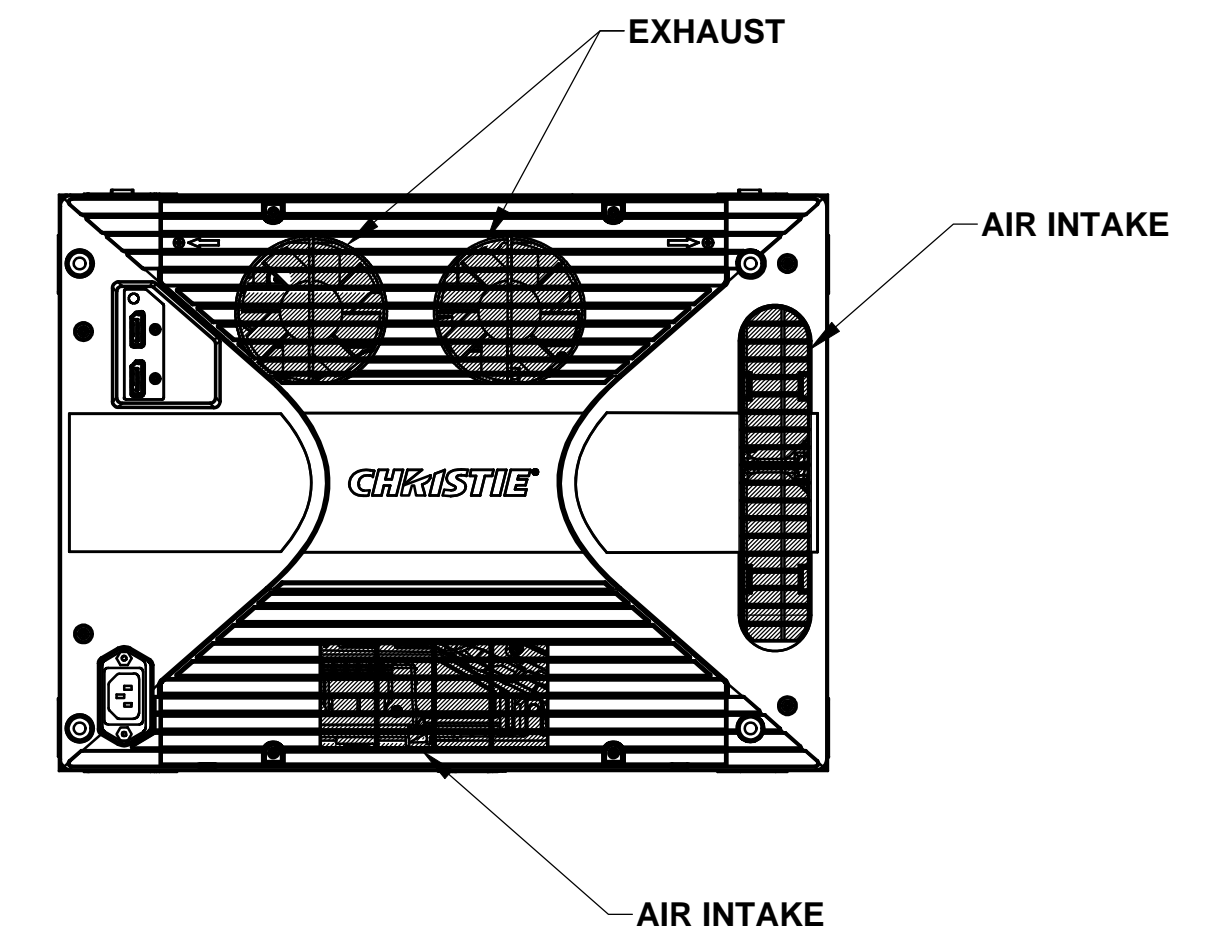
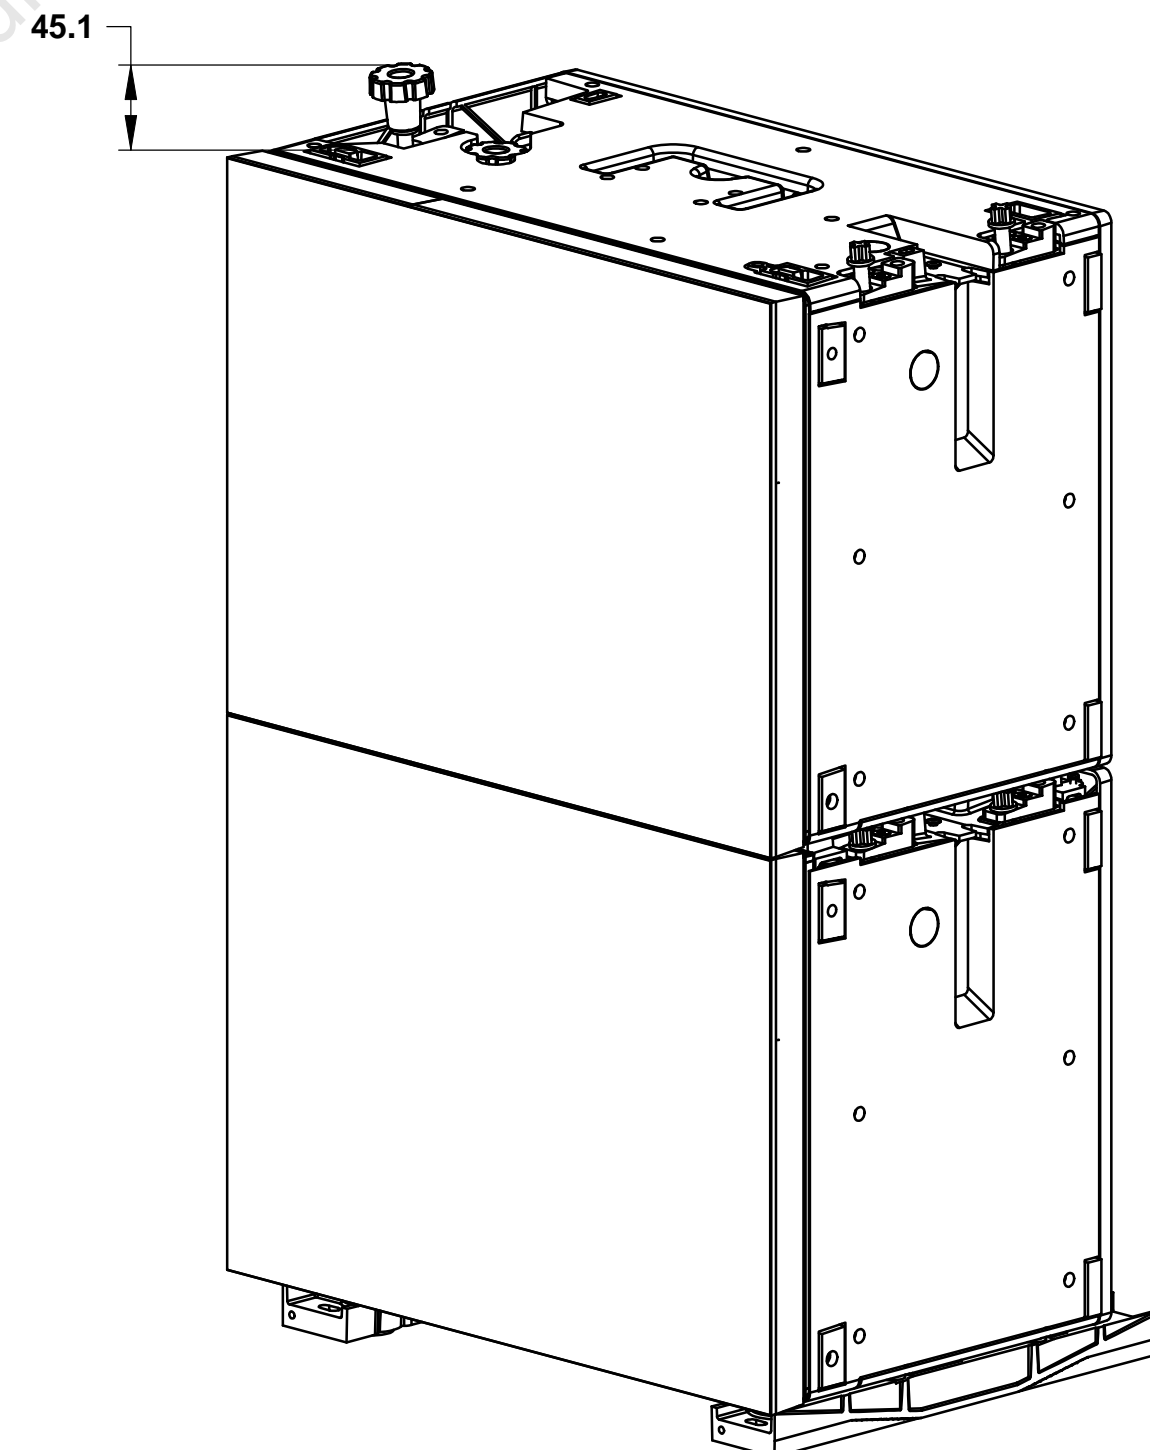


TWO MICROTILES WITH LEVELLING FEET

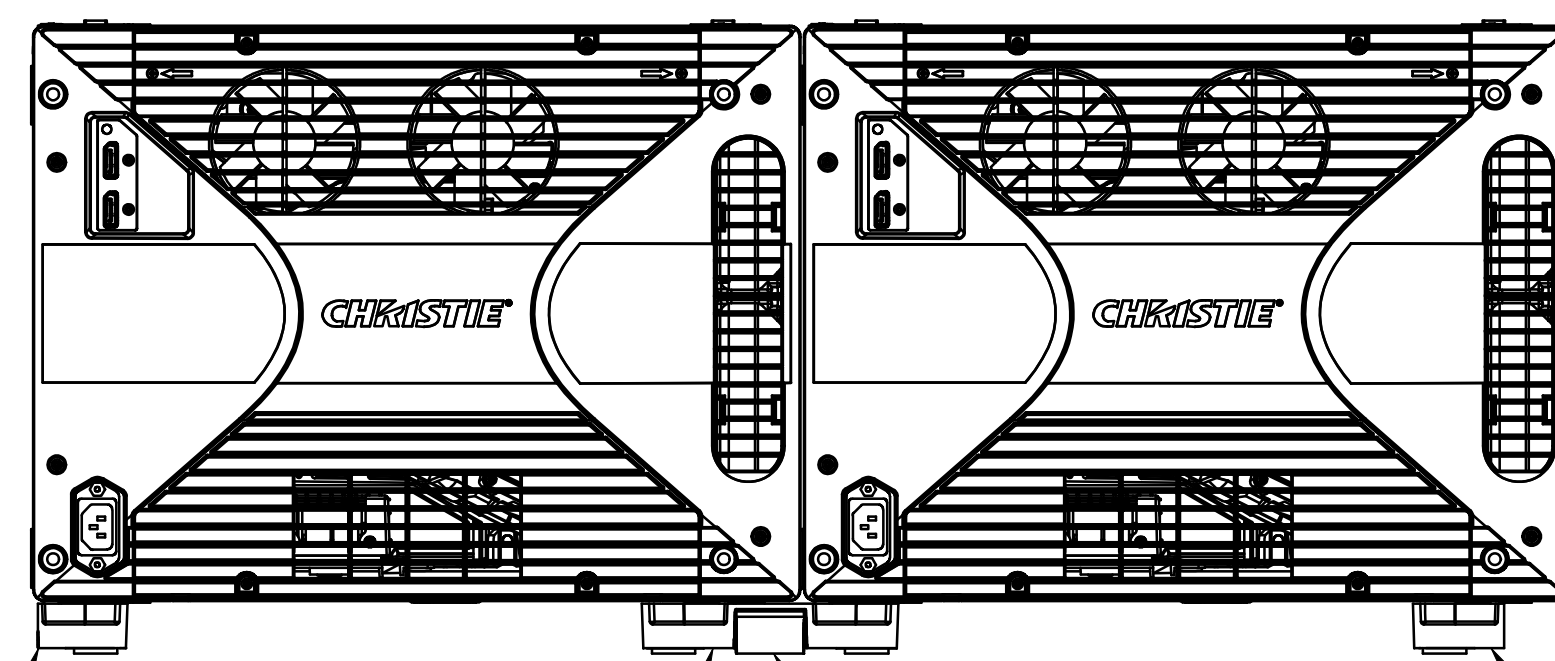


△02
LEVELLING FOOT RIGHT HAND SIDE (OPTIONAL SET-UP KIT)
△02
LEVELLING FOOT MIDDLE (OPTIONAL SET-UP KIT)
△02
LEVELLING SHIM (OPTIONAL SET-UP KIT)
△02
LEVELLING FOOT LEFT HAND SIDE (OPTIONAL SET-UP KIT)
△02

MICROTILE SHOWN WITH WALL MOUNTING BRACKET

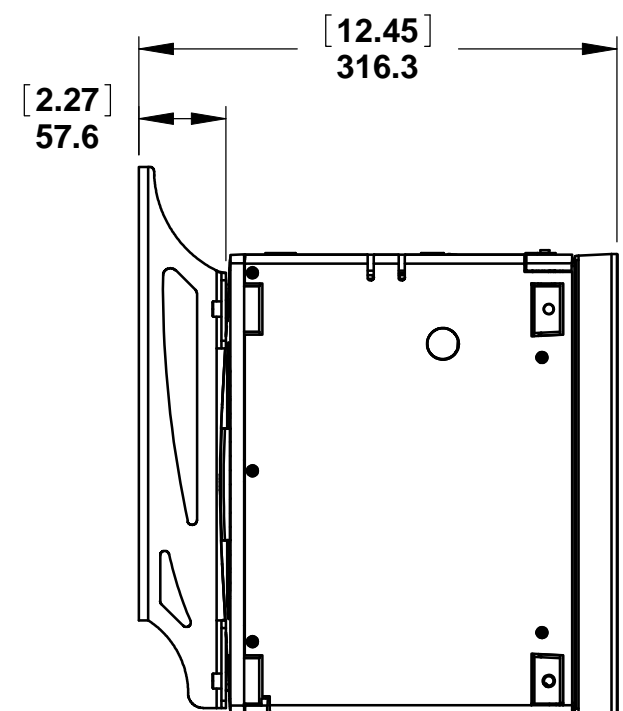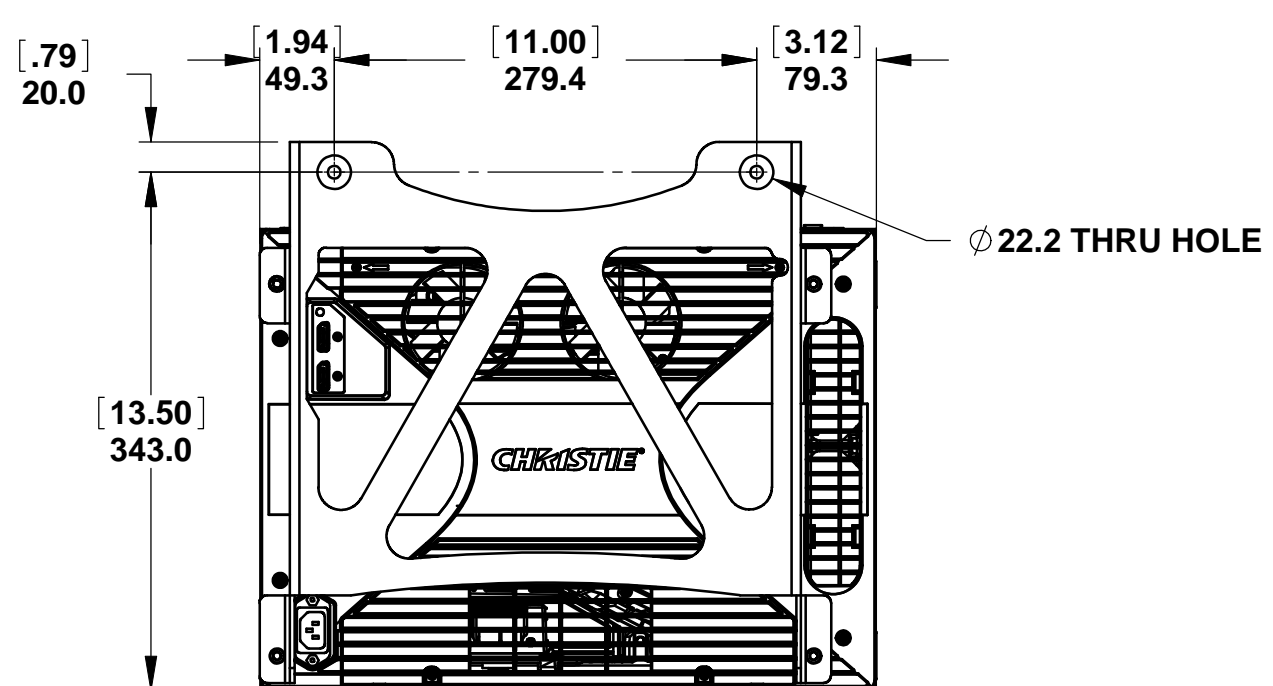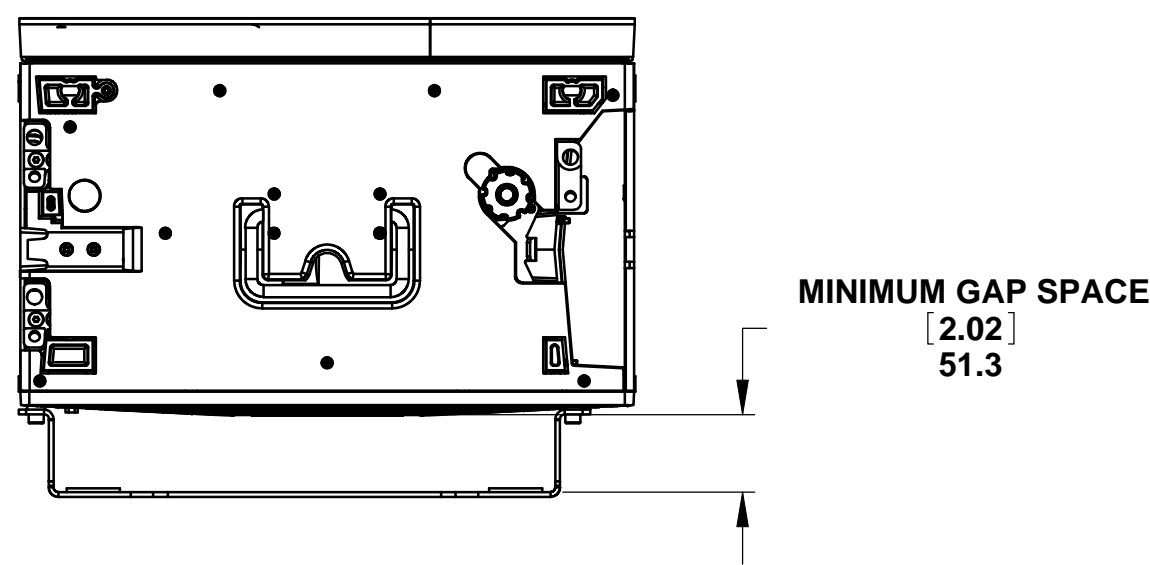


ATTACHING WALL MOUNTING BRACKET WITH M6 BOLTS

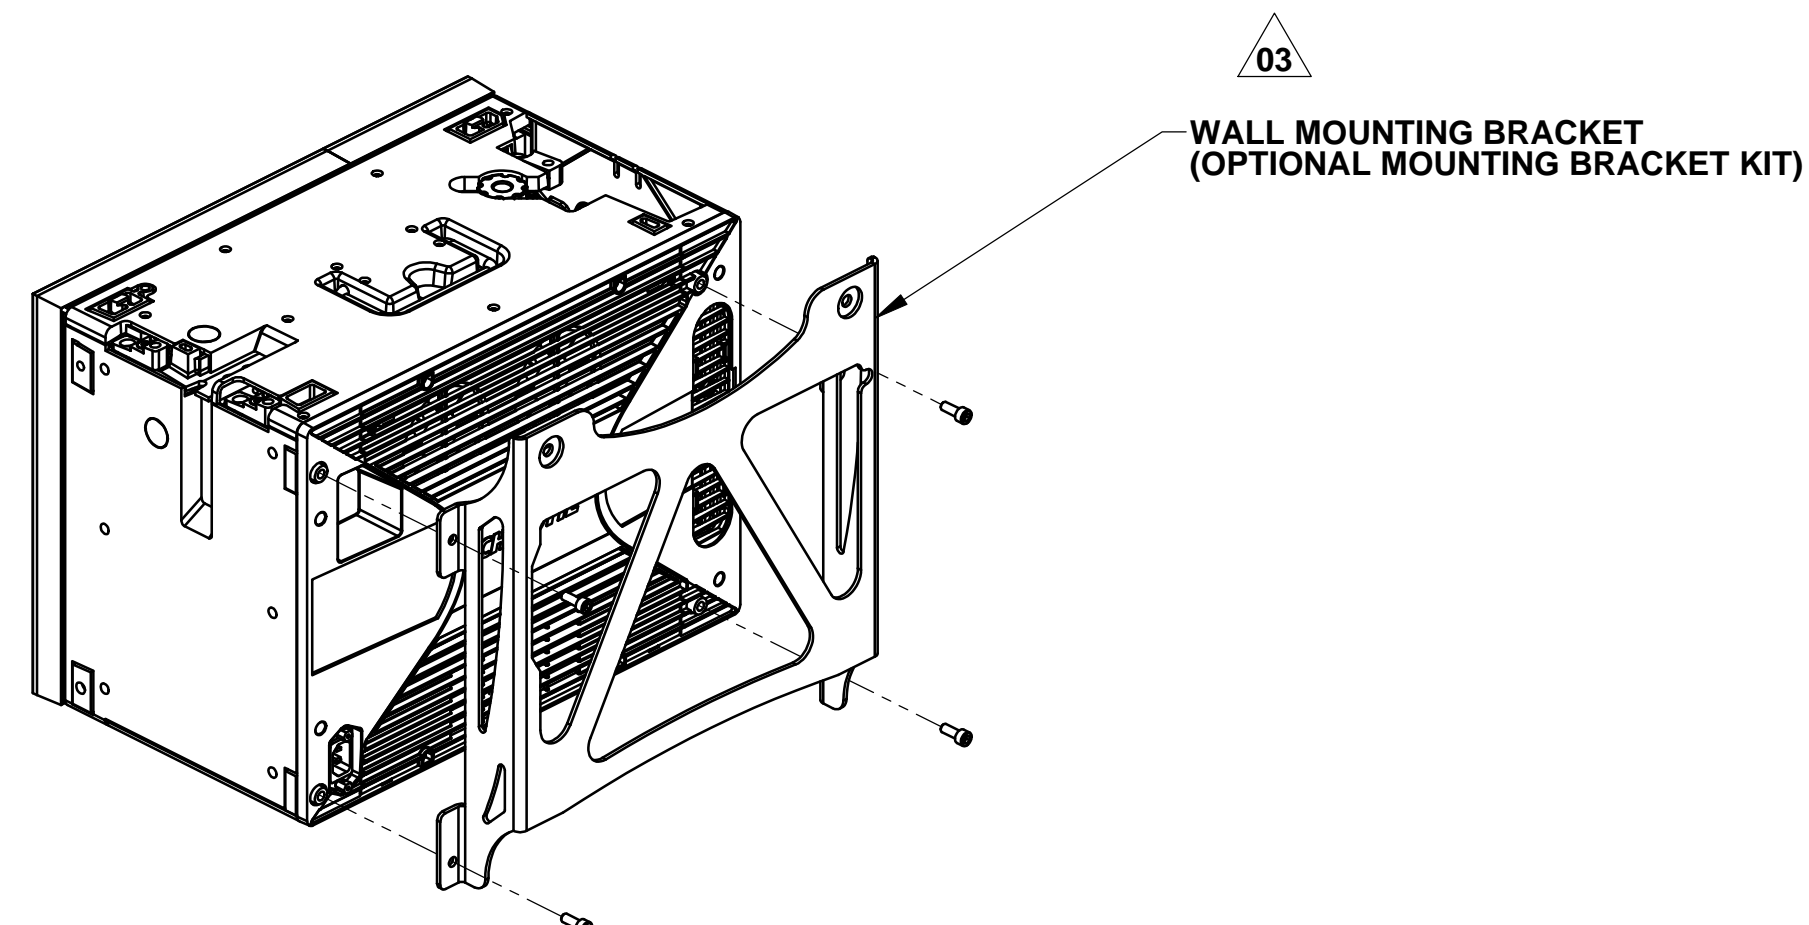


OFFICIALLY RELEASED
 Document Control
 June 23, 2010

FOUR MICROTILES WITH WALL MOUNTING BRACKETS

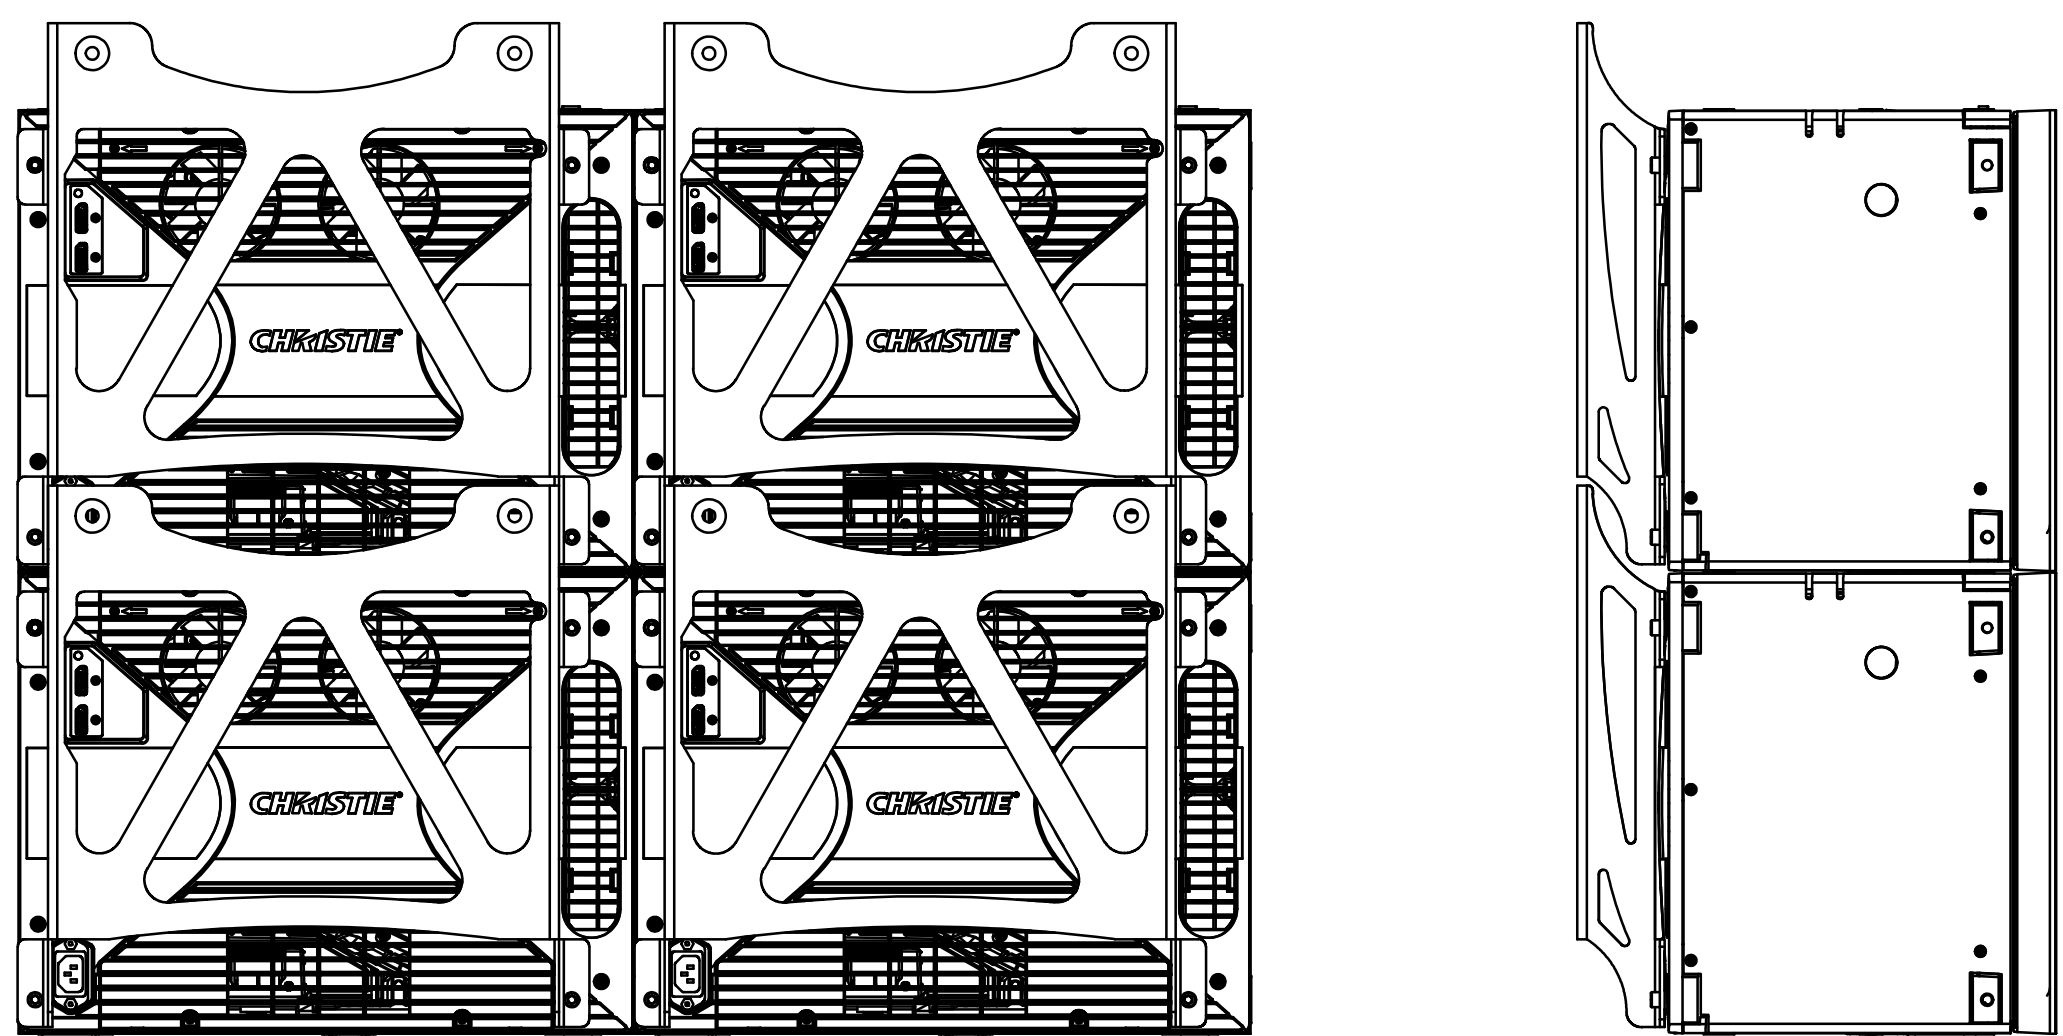

FOUR MICROTILES WITH WALL MOUNTING BRACKETS REAR AXONOMETRIC VIEW

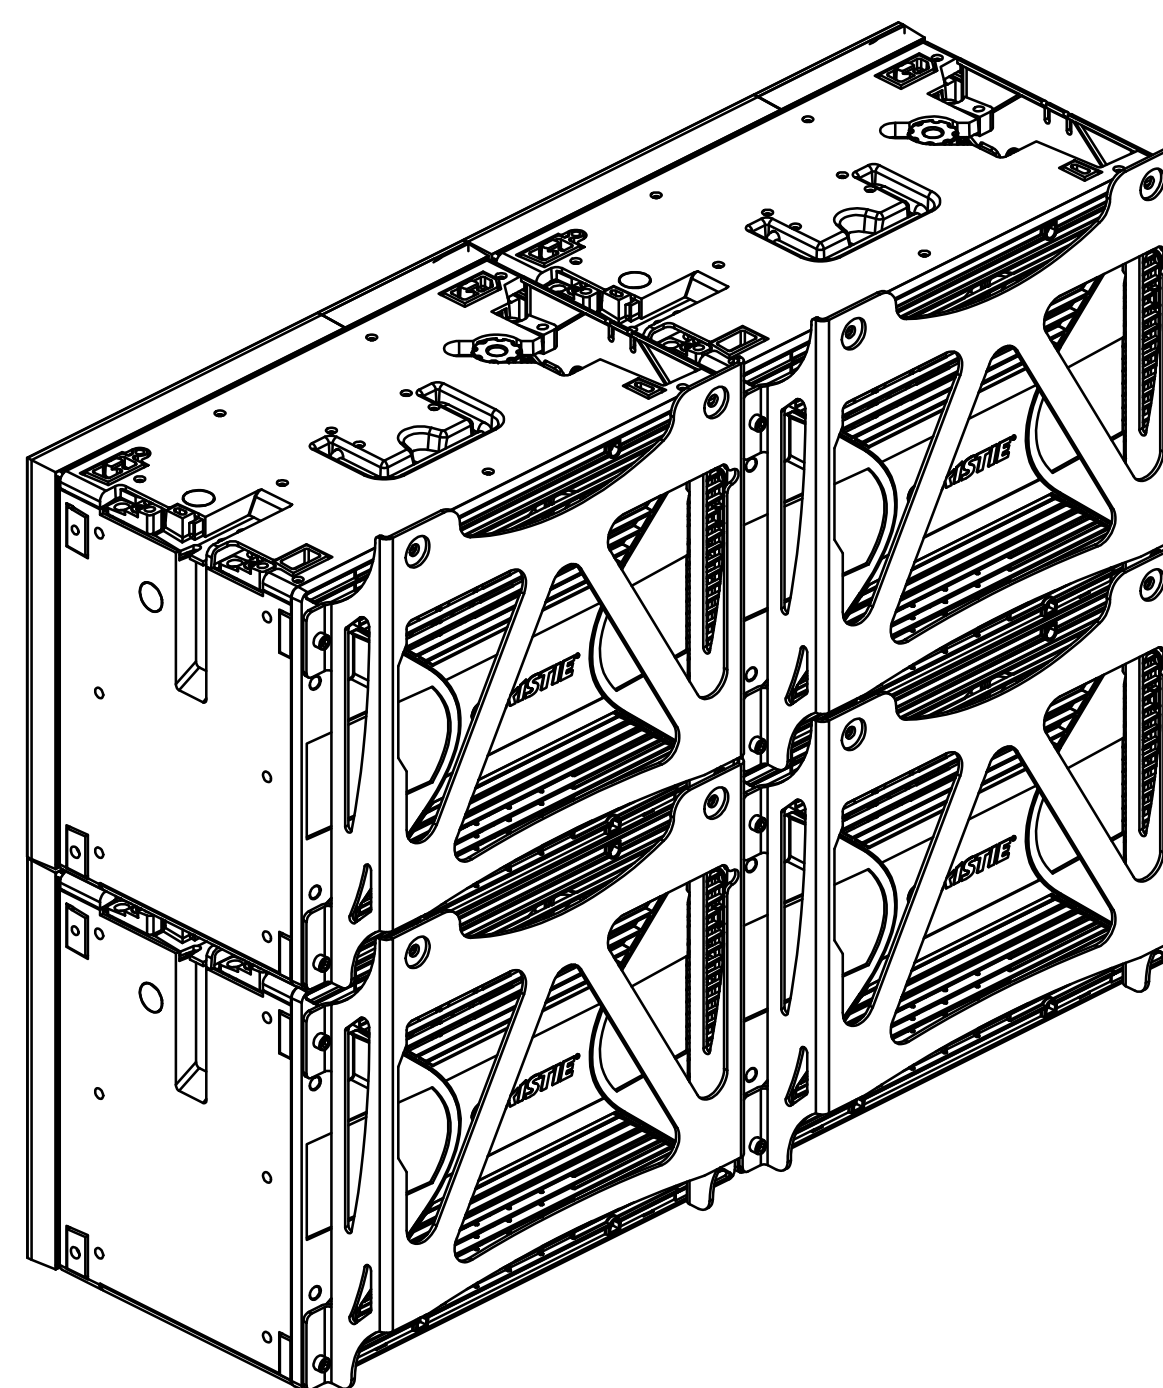

GENERAL NOTES:
 POWER CABLE AND DATA CABLES CAN BE RUN THROUGH THE BRACKET SIDE CUTOUTS